

# Work Technique

Vogl Frieze Tape Set  
Technical Information



## Vogl Frieze Tape Set



## Perfect Borders & Perimeters

*Straight from the roll*




Perfectly simple frieze solutions

# Work Technique


Vogl Frieze Tape Set  
Installation Guide 106



Always check gypsum plasterboard area to be jointed. Sand the joint area and screw holes as required. Only sand in the direction of the joint, do not cross sand




After sanding, wipe the joint area with a damp sponge to remove any dust or swarf



### General site conditions / manufacturer's instructions



- Only store liquid glue in a \*\* frost free environment \*\*
- Close liquid glue containers securely during long breaks in work
- Stir it well before use!
- The application temperature for the glue should be at least +10°C and the environment temperature not below +5°C
- Avoid fast heating and cooling of rooms
- Relative humidity: 40-80%
- Self-levelling, cement or asphalt screeds must be fully dried – no residual moisture
- Tapes must only be applied „end to end“ – i.e. not overlapping
- Do not dilute liquid glue

Ensure the liquid glue is evenly distributed on the lambskin roller by rolling downwards over the paint grid supplied



Vogl Liquid Glue = Ready Mix


Apply the liquid glue to the joint area then apply the tape using palm pressure to secure it in place (Caution: the perforations within the joint tape area must be completely covered) Once the frieze tape has dried, any partially open perforations at the joint area must be sealed with filler



Different widths of tape can be combined without difficulty. However, please note that tapes must only be applied flush (end to end). Under no circumstances should tapes be overlapped



Re-load the lambskin roller with liquid glue ensuring the liquid glue is evenly distributed on the roller by rolling downwards over the paint grid supplied




### Surface treatment for painters (in accordance with GTC paintwork DIN 18363)

- Only apply coating by roller, spray applications are not permitted!
- In general, a suitable primer should be applied prior to application of coloured paints in accordance with the relevant paint manufacturer's instructions
- Recommended manufacturer's drying times for both primers and finishing coats must be strictly adhered to
- Alkaline coatings are unsuitable for gypsum plasterboards
- 3 coats of paint must be applied (1 X primer + 2 X finishing coats)
- Always consult the relevant manufacturer's technical data sheets for primers and finishing coats

Vogl Liquid Glue = Ready Mix




Re-apply the liquid glue to the joint area as before. Note: only work „wet on wet“



System's drying time: 12 hrs



If necessary (when dry), glue on the tape's visible surface can be smoothed by gently sanding in the direction of the joint – do not cross sand!



Once fully dry, any covered holes can be re-opened using a sharp blade



### Vogl Frieze Tape Set contents

Vogl liquid glue, Vogl tape, stirring paddle, roller grid, lambskin roller, sanding pad, sanding paper, plastic spatula, sponge.

Vogl Frieze Tape Set is available in various widths (20 mm, 50 mm, 75 mm, 100 mm, 150 mm).

# Work Technique

Vogl Frieze Tape Set  
Advantages



## Ceiling friezes in record time

There are various ways of creating plain borders and perimeters for gypsum plasterboard perforated ceilings. However, these typically require intensive preplanning and tedious time consuming work on site. Now there is an efficient, clean and safe solution: the Vogl Frieze Tape Set. With this method non-perforated


frieze areas can be produced economically offering significant time saving and minimum hassle. The frieze tape set is designed to meet site requirements for producing a frieze of any width and is supplied complete with accessories. Just a few simple steps can produce a clean finish.



## Advantages of Vogl Frieze Tape Set

The unique finish provides key advantages when creating non-perforated areas:

- Quick, safe and clean workmanship
- No generation of dirt and dust
- Active sound absorption even within the joint area
- Holes can be re-opened if required
- No penetration of filler, no subsequent impairment of holes

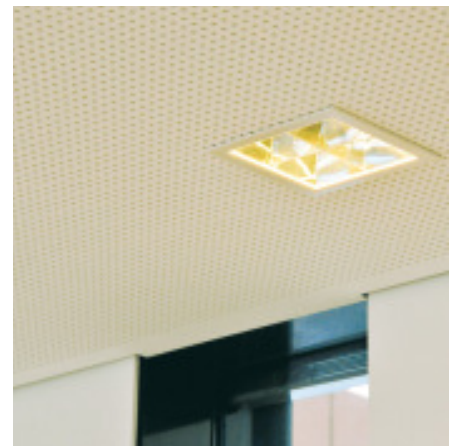

The Vogl Frieze Tape Set contains all the necessary material, tools and a detailed installation guide for maximum reliability on site and guaranteed results

The right tools at the right time in exactly the right place

# Work Technique

## Vogl Frieze Tape Set

### Product Range / Tender Specification



Image shows article 90005325

Take advantage of our wide range of online support services including brochures, newsletters, detailed plans, invitations of tenders and installation guides available as PDF and with animation.



Online support, making your job easier:  
[www.vogl-ceilingssystems.com](http://www.vogl-ceilingssystems.com)

Article No.	Description	Tape measurements Linear metres
90005324	Vogl Frieze Tape Set 20 mm Tape width 20 mm	2 rolls of tape 20 mm = 200 Linear meters
90005325	Vogl Frieze Tape Set 50 mm Tape width 50 mm	3 rolls of tape 50 mm = 150 Linear meters
90005326	Vogl Frieze Tape Set 75 mm Tape width 75 mm	2 rolls of tape 75 mm = 100 Linear meters
90005327	Vogl Frieze Tape Set 100 mm Tape width 100 mm	1 rolls of tape 100 mm = 50 Linear meters
90005328	Vogl Frieze Tape Set 150 mm Tape width 150 mm	1 rolls of tape 150 mm = 50 Linear meters

- I would like to find out more. Please send me additional information.
- I have a project. Please could your project consultant contact me to arrange an appointment.
- I would like to register for the free email newsletter. The newsletter can be cancelled at any time.

## Frieze design accessories

### Vogl Frieze Tape

When using Vogl frieze tape from the Vogl Frieze Tape Set always apply frieze design accessories in accordance with manufacturers' instructions.

Frieze width: ..... mm



**Fax reply +49 (0) 9104-825-250**

Name .....

Company .....

Street .....

Postcode/Town/City .....

Telephone .....

Fax .....

Email .....

Our mailing list is used solely for our purposes only and will not be given or sold to any other person or company for any reason. We use it to let you know of other special offers or promotions that we may be running and to keep you abreast of new and upcoming products that we are introducing as well as other innovative ideas we have to offer. We would like to keep an ongoing relationship with you and so we would like to send you an occasional email to maintain contact and let you know that your business is of interest to us. Please rest assured that this information is safe with us. At Vogl we respect everyone's privacy and will promptly remove anyone from our occasional mailing immediately on request.

### Vogl Deckensysteme GmbH

Industriestrasse 10  
 91448 Emskirchen  
 Germany  
 Phone +49 (0) 9104-825-0  
 Fax +49 (0) 9104-825-250  
[info@vogl-deckensysteme.de](mailto:info@vogl-deckensysteme.de)  
[www.vogl-ceilingssystems.com](http://www.vogl-ceilingssystems.com)

Subject to technical changes. Consumption, amounts and design details are empirical values. The details contained in this brochure correspond to the current status of technology. All valid building technology regulations, norms and guidelines must also be observed accordingly alongside our processing requirements. All rights reserved. Reprints as well as electronic reproduction, even extracts, require the express consent of Vogl Deckensysteme GmbH, Industriestrasse 10, 91448 Emskirchen, Germany.