



PERLA OP 0.95

PERLA OP 0.95



PERLA OP 0.95	BOARD	TEGULAR	MICROLOOK	SL2
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm	 Prelude 24 mm Main Runner Prelude Sixty ² System Z
	 15mm/18mm	 9.5mm 15mm 15° 6mm	 4.5mm 15mm/18mm 15° 6mm/6mm	 9mm 11.3mm 11.9mm 13mm 18mm 26mm A B
Tiles				
600 x 600 x 15 mm	3819 M	3824 M		
675 x 675 x 15 mm	3820 M*	3825 M*		
600 x 1200 x 15 mm	3821 M	3826 M*	3829 M*	
600 x 600 x 18 mm			2883 M	
675 x 675 x 18 mm			3828 M*	
Planks				
600 x 1500 x 18 mm	3092 M			
600 x 1800 x 18 mm	3093 M			
300 x 1500 x 18 mm				3094 M
300 x 1800 x 18 mm				3096 M


*This size is not available in all markets, Please contact your Armstrong Technical Sales for product range information.



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	α_p
• Tiles 15 mm									
0.95	0.90	0.45	0.80	0.95	0.90	1.00	1.00		α_p
• Tiles, Board Planks 18 mm									
0.95	0.90	0.50	0.85	0.95	0.90	1.00	1.00		α_p
• SL2 Planks									
0.95	0.90	0.45	0.85	0.95	0.90	0.95	1.00		α_p

Sound Absorption Class = A

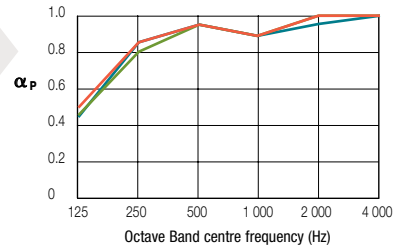

EN ISO 10848-2 & EN ISO 717-1

D_{nfw}
27 dB (SL2 Planks)
25 dB (Tiles, Board Planks)



EN ISO 140-3 & EN ISO 717-1

R_w
12 dB (Tiles 15 mm)
10 dB (Tiles 18 mm)



EN 13501-1

EEA	Euroclass A2-s1,d0
-----	--------------------

RUS	G1, V1, D1, T1 to FZ 123
-----	--------------------------



EN 12667 & ISO 8301

$\lambda = 0.036$ W/m K



95 % RH



ISO 5



15 YEAR guarantee



≈ 3.3 kg/m²



This commercial ceiling tile has been certified for its material content, recyclability and manufacturing characteristics. c2ccertified.org



Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu