



SAHARA MAX

SAHARA MAX




SAHARA MAX	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
	 18mm	 18mm, 9.5mm, 6.5mm, 15°	 18mm, 8mm, 4.5mm, 15°
600 x 600 x 18 mm	2103 M	2260 M	2261 M
600 x 1200 x 18 mm	2104 M		



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	α_p
0.65	0.65	0.50	0.55	0.75	0.75	0.70	0.45		

Sound Absorption Class = C

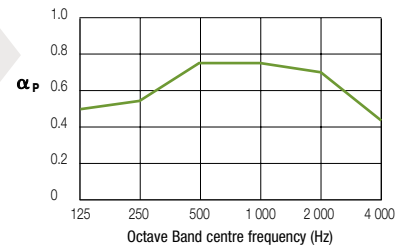

EN ISO 10848-2 & EN ISO 717-1

D_{nfw}	35 dB
-----------	-------



EN ISO 140-3 & EN ISO 717-1

R_w	17 dB
-------	-------



EN 13501-1

EEA Euroclass A2-s1, d0

RUS KM1 (G1, V1, D1, T1) FZ 123



EN 12667 & ISO 8301

$\lambda = 0.06$ W/m K



95 % RH



LIFETIME guarantee



≈ 4.16 kg/m²



Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu

